




“SS” Series Pump

“SS” series swimming pool pump is designed for medium head installation in domestic pool and spa pool. 1.5 inch suction and discharge port with transparent lid. It operates at a low decibel and energy consumption which requires minimal maintenance.

Technical Information

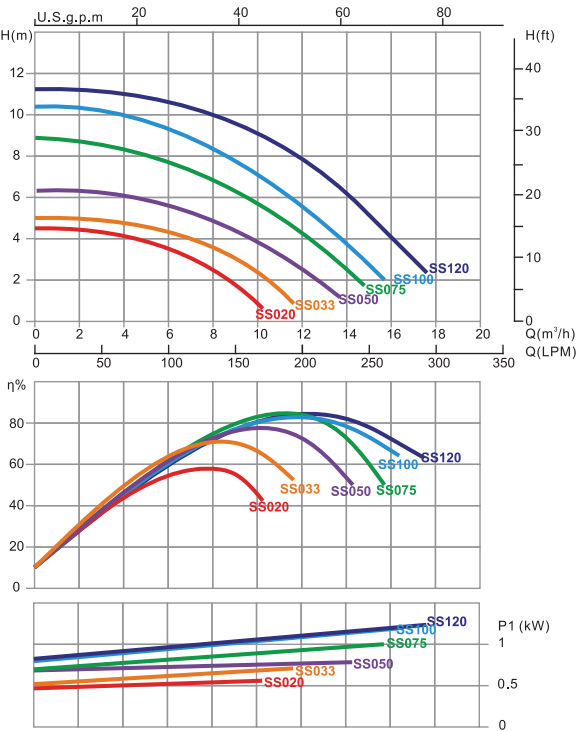

Remarks: Flow curve information based on 220V/50Hz motor.



Highlight Features:

- Asynchronous, Two poles
- Class insulation: 130
- IPX5 Waterproof standard
- Built-in thermal protection
- External heat sink
- Available in 50Hz or 60Hz with 220V/110V
- Special design union compatible for both Imperial and Metric measurement standard
- S.S 316 Shaft
- S.S 316 Mechanical seal



Product Information & Dimension

Code 220V/50Hz	Code 110V/60Hz	Model No	Connection Size	Input power	Horsepower
88022401	88022601	SS020	1.5 inch 50mm	0.28kW	0.2hp
88022402	88022602	SS033	1.5 inch 50mm	0.43kW	0.33hp
88022403	88022603	SS050	1.5 inch 50mm	0.55kW	0.50hp
88022404	88022604	SS075	1.5 inch 50mm	0.75kW	0.75hp
88022405	88022605	SS100	1.5 inch 50mm	0.90kW	1.0hp
88022406	88022606	SS120	1.5 inch 50mm	0.97kW	1.2hp

Model No	A mm	B mm	C mm	D mm	Capacitance 220V	Capacitance 110V	Weight(kg)
SS020	507	211	340	195	5µF	20µF	6.20
SS033	507	211	340	195	6µF	24µF	6.50
SS050	552	211	340	195	8µF	30µF	8.03
SS075	552	211	340	195	14µF	40µF	9.01
SS100	552	211	340	195	20µF	60µF	9.09
SS120	552	211	340	195	20µF	60µF	11.00

